

# A & M Sculptured Lighting

1781 N. Indiana Street Los Angeles, CA., 90063 (323)263-2221 Fax (323)263-2226



## VJ

### S E R I E S

The VJ series is a functional decorative-style fixture that can be supplied with refractor or flat lens for dark sky compliance.

CONTEMPORARY 




The housing is made from heavy wall cast aluminum. Its heavy gauge spun aluminum hood is bolted together into a strong and durable, wet location rated assembly.

The lamp is vertically mounted, positioned to provide the appropriate IES light distribution.

The reflector is constructed of segmented specular aluminum available on type 3 and 5 light distributions.

All electrical components are UL listed with electromagnetic high power factor ballast for HID lamps in voltages of 120 to 480 or an electronic ballast for compact fluorescent lamp in 120 or 277 volts. Ballasts are mounted on a removable tray for easy maintenance.

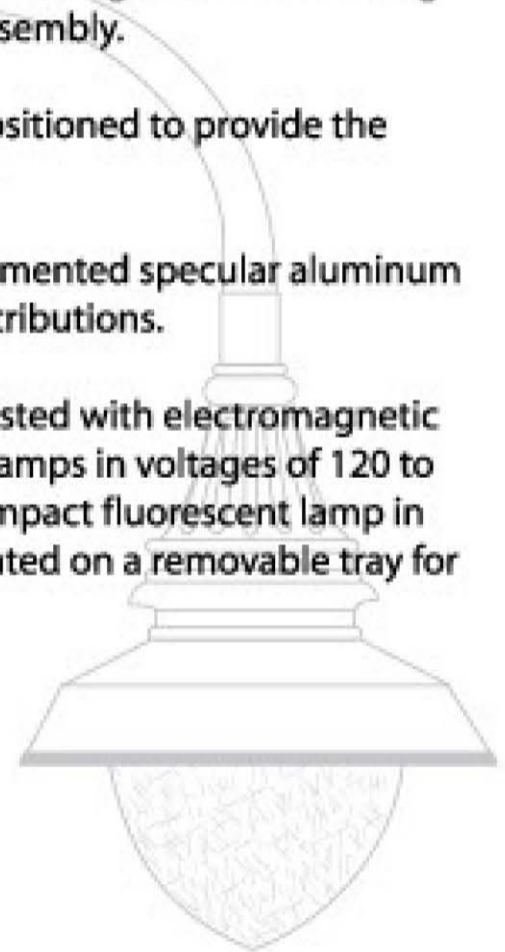

## *A & M Sculptured Metals*

25

UL LISTED FOR WET LOCATIONS

[www.amsculptedmetals.com](http://www.amsculptedmetals.com)




# A & M Sculptured Lighting

1781 N. Indiana Street Los Angeles, CA, 90063  
Tel. (323)263-2221 Fax. (323)263-2226

VJ

S E R I E S

- Housing:** Corrosion resistant, cast A356 aluminum alloy, .188" min. wall thickness ballast compartment, and heavy gauge spun aluminum hood.
- Lens:** Flat tempered glass, convex tempered glass, textured drop lens or refractor sealed into cast aluminum frame.
- Electrical:** All electrical components are UL approved.
- Ballast:** High power factor - 20°C starting temperature. The ballast is removable as a unit for easy maintenance.
- Reflector:** Segmented specular Alzak, available on type 3 and 5 light distribution.
- Arms:** Extruded aluminum.
- Finish:** Polyester powder fuse coating is standard; other finishes are available upon request.

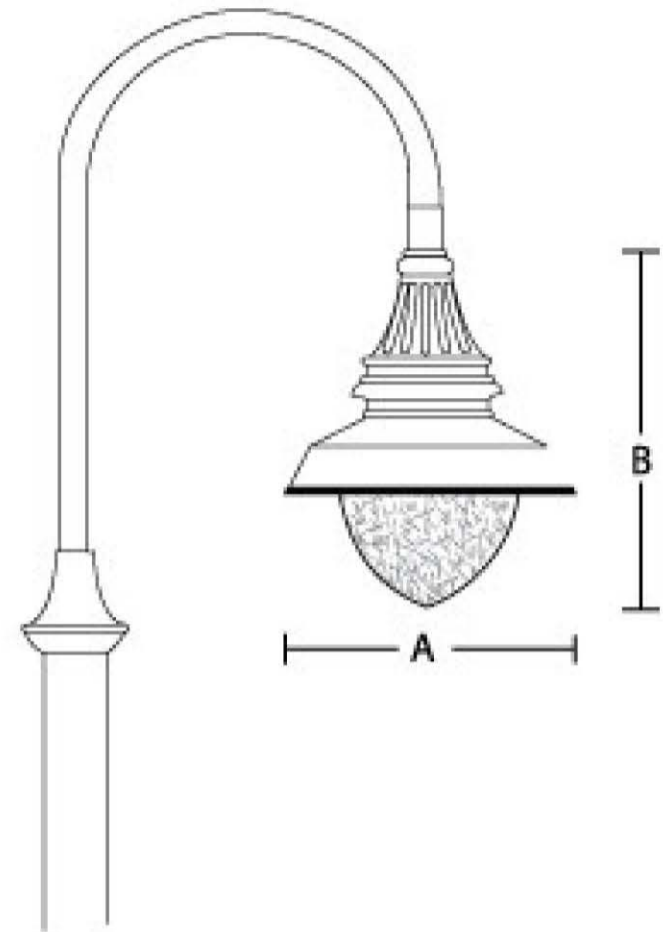

MOD # VJ      WATTAGE 175 MAX      A 18"      B 22"


## Ordering Information:

1. Model Number
2. Wattage
3. Lamp Type
  - H - Metal Halide
  - S - High Pressure Sodium
  - PS - Pulse Start
  - CF - Compact Fluorescent\*
4. Voltage
  - 120, 208, 240, 277, 480 and
  - MT (Multi Tap) - 120, 208, 240, 277
5. Light Distribution
  - 3 and 5
6. Lens
  - FG - Flat Glass
  - CG - Convex Glass
  - TD - Texture Drop
  - RF - Refractor
7. Mounting
8. Arm Style
9. Finish
  - BK - Black
  - BZ - Bronze
  - GR - Green
  - VG - Verde Green
  - (Other colors upon request)
10. Options
  - HS - House Shield
  - FS - Fuse
  - PC - Photo Cell

### Lens



Flat Glass



Convex Glass



Textured Drop



Refractor

### Mounting




WM - Wall Mount


1A - Single Arm

2A - Twin 180°

2B - Twin 90°



3A - Triple 90°




3B - Triple 120°



4Q - Quad

### Arm Styles

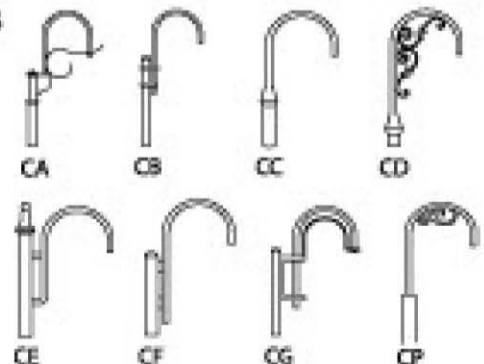

CA

CB

CC

CD

CE

CF

CG

CP

1. Mod. #	2. Wattage 3. Lamp Type	4. Voltage	5. Light Dist.	6. Lens	7. Mounting 8. Arm Style	9. Finish	10. Options

